


Microwave sensor instruction

Mode No: SK-600

1. Appearance and size

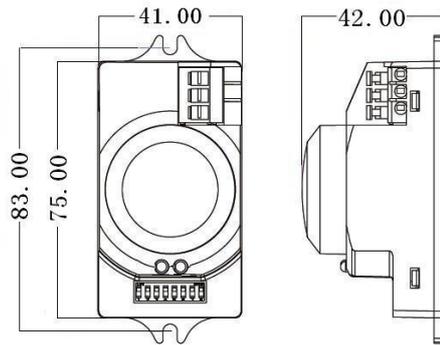

2. Product introduction

SK-600 is an active motion detector with adjustable sensitivity, daylight detection and time setting. It's based Doppler principle and RADAR technology, adopting rod antenna & high performance micro-chip. It is easy to install, provide high probability of detection, low nuisance alarms and resistance to rain, fog, wind, dust, falling snow and temperature extremes.

3. Technical parameters

Power supply: 220-240VAC

Power frequency: 50/60Hz

HF system: 5.8GHz +/-75MHz CW radar, ISM band

Max load: 1200W

Transmission power: <0.2mW

Power consumption: approx.0.5W

Product size(L*W*H) : 89*41*42mm

Installation sit: ceiling mounting

Reach:2-10m (radii.) , adjustable


Time setting: 10sec to 30min

Detection angle: 360°


Light control: 10~2000LUX

Operating temperature: -35°C~+80°C


NOTE: The high-frequency output of this sensor is <0.2Mw-that is just one 5000th of the transmission power of a mobile phone or the output of a microwave oven.

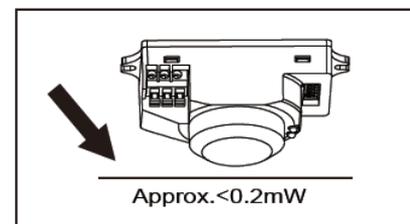

4. Induction range

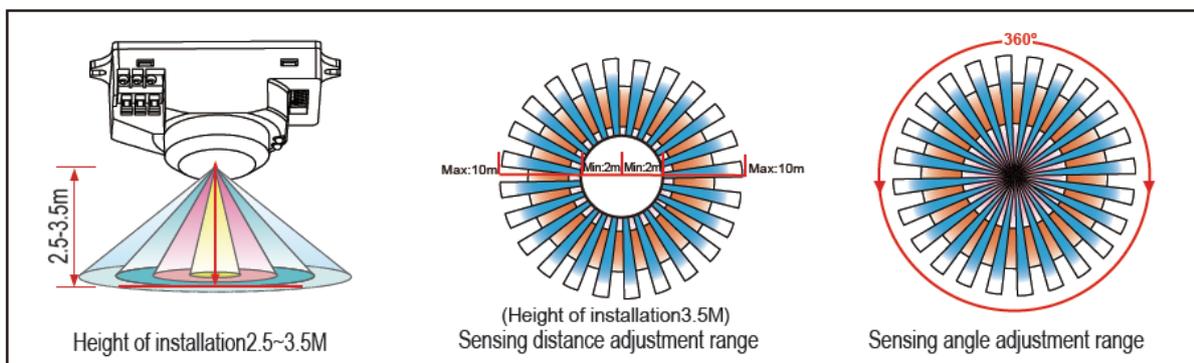


5. Wiring diagram

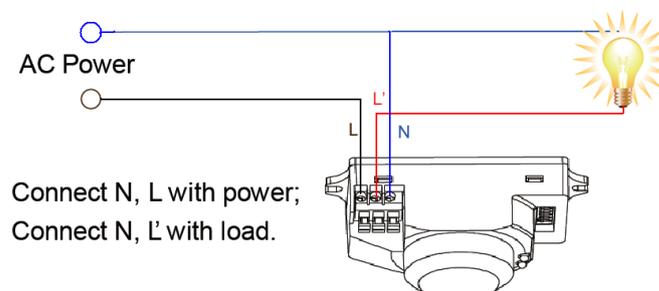

6. Settings

Reach setting (sensitivity)

Reach is the term used to describe the radii of the more or less circular detection zone produced on the ground after mounting the sensor light at a height of 2.5m, switch to the on is “1”, switch to the off is “0”;The corresponding file of switch location and detection distance as follow:




S1	S2	distance	S1	S2	distance
0	0	2m	1	0	8m
0	1	5m	1	1	10m

NOTE: The above detection distance is measured using a person who is between 1.6m~1.7m tall with an average build, moving at a speed of 1.0~1.5m/sec. if any of these variables are changed, the detection distance will also resultantly change.

Time setting

Time can be set 10s to 30min.Any movement detected before this time elapse will re-start the timer. It is recommended to select the shortest time for adjusting the detection zone and for performing the walk test. Switch to the on is “1”, switch to the off is “0”; the corresponding file of switch location and detection distance as follow




S3	S4	S5	time	S3	S4	S5	time
0	0	0	10S	1	0	0	15min
0	0	1	1min	1	0	1	20min
0	1	0	5min	1	1	0	25min
0	1	1	10min	1	1	1	30min

NOTE: after the light switches OFF, it takes approx. 1sec before it is able to start detecting movement again. The light will only switch on in response to movement once this period has elapsed.

Light-control setting

The chosen light response threshold can be infinitely from approx. 10LUX-2000LUX. Switch to the on is “1”, switch to the off is “0”; he corresponding file of switch location and detection distance as follow:



S6	S7	S8	LUX	S6	S7	S8	LUX
0	0	0	24H	1	0	0	100 LUX
0	0	1	10 LUX	1	0	1	200 LUX
0	1	0	20 LUX	1	1	0	300 LUX
0	1	1	50 LUX	1	1	1	500 LUX

7. Troubleshooting

malfunction	Cause	Remedy
The Load does not work	Wrong light control setting selected	Adjust setting
	Load faulty	Change load
	Mains switch off	Switch on
The load work always	Continuous movement in the detection zone	Check zone setting
The load work without any identifiable movement	The sensor not mounted for detecting movement reliably	Reinforcement install accessories
	Movement occurred, but not been identified by the sensor (movement behind wall, movement of a small object in immediate lamp vicinity etc.)	Check the induction space settings
The load will not work despite movement	Rapid movements are being suppressed to minimize malfunctioning or the detection zone you have set is too small	Check the induction settings

Tips

Please under the guidance of professionals personage to set related parameters of the sensors, do not secretly dismantling the product. We reserve the right to make technical change without prior notice.