


# Gitafish®

## 让音乐更好玩

### Wireless Portable

### Multi-function E-Guitar

### Model: B1

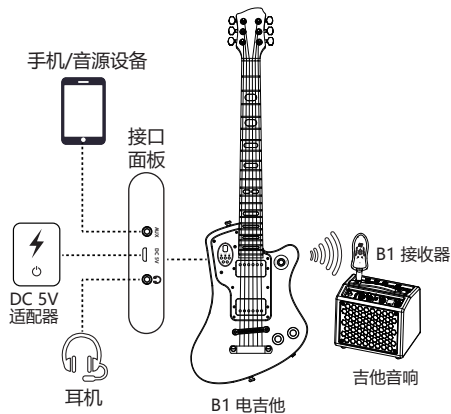


#### 主要特性

- \* B1 吉他开机后，变成无线多功能吉他。把 B1 接收器插入音响，实现无线传输功能，支持多套产品同时使用；
- \* B1 吉他内置三种常用效果：CHS (Chorus) (Overdrive)、TRE (Tremolo)，按键实现效果切换；
- \* B1 吉他内置耳机输出，在练琴时无需其他设备；
- \* B1 吉他支持 Aux 输入背景音乐，让演奏更好玩；
- \* B1 吉他和接收器内置大容量电池，充满电可连续工作7小时以上。如果连续15分钟不弹奏，吉他将自动关机，以节能环保；
- \* 独特的外形设计，比普通电吉他轻1kg，小三分之一，便于随身携带；
- \* 支持传统电吉他和多功能电吉他两种模式，兼具现代与传统之美；
- \* B1 适用场合：聚会表演、演出前的热身练习等，可随时随地演奏。给您一流的体验。

#### 产品简介

### B1电吉他:

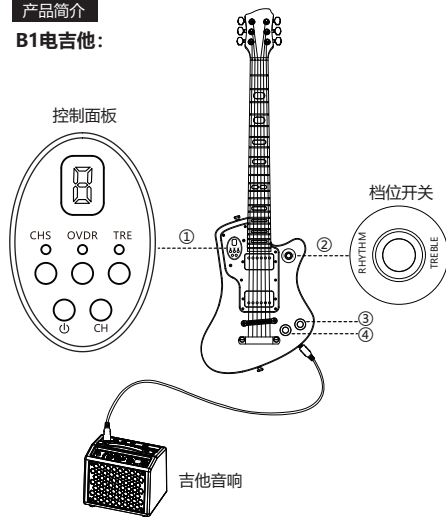

1. 三种效果模式：CHS-合唱模式，OVDR-过载模式，TRE-颤音模式。每个指示灯下方都有对应按键，用来实现效果切换。

⏻：电源键，长按开机或关机。

CH：变频键，开机模式下短按，在 CH0-CH9 之间切换频道，在与接收器配对时，短按做 ID 配对确认。

📺：频道显示屏。


2. 拨到 RHYTHM 为琴颈模式，拨到 TREBLE 为琴桥模式，拨到中间时两种模式同时起作用。
3. 吉他音量调节旋钮。
4. 音色调节旋钮。

#### 两种工作模式说明：

- a. 传统电吉他模式：在 B1 电源关闭状态下，只能通过音频线连接音响输出音乐。
- b. 无线多功能模式：在 B1 电源开机状态下，只能通过 B1 接收器输出，或耳机输出音乐。

**提醒：B1只能工作在其中一种模式下。**

### B1接收器:

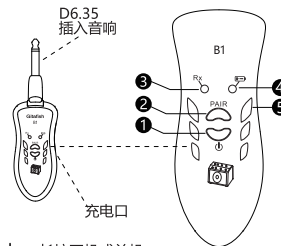

1. ⏻：长按开机或关机。
2. PAIR键：ID 配对键
3. Rx--接收指示灯；
4. 🔋--低电时橙色灯亮；
5. 充电灯：充电时，红灯长亮，充满电后，红灯熄灭。

**特别提醒：如吉他音乐无法传输到接收器时，请执行以下操作。**

#### 配对操作

- a. B1 吉他在关机状态下，长按“⏻”不放，直到屏幕显示“P”并闪烁，进入配对状态。
- b. 接收器在关机状态下，先按“PAIR”键，再按电源键“⏻”开机，“RX”灯慢速闪烁。
- c. 再短按吉他“CH”键进行确认，吉他频道显示屏和接收器的“RX”指示灯均长亮，完成 ID 配对。

#### 配对的作用

吉他和接收器 两端彼此唯一识别，几套同时工作时，请在吉他的上按“CH”键错开频道，以保证声音不会串扰。

#### 技术参数

工作频道：10个

供电方式：内置锂电池

无线距离：15米左右

频率响应：20-20kHz

延迟 < 3ms

电池可用时间：大约7小时

#### 包装清单

|               |         |        |         |
|---------------|---------|--------|---------|
| B1 电吉他        | -----1把 | 音频连接线  | -----1根 |
| B1 接收器        | -----1个 | 说明书    | -----1本 |
| 吉他背包          | -----1个 | 吉他调节工具 | -----1套 |
| 1 出 2 USB 充电线 | -----1根 |        |         |

特别的礼物，送给特别的您！

# Gitafish®


Make music more funny

## Wireless Portable

Multi-function E-Guitar

### Model: B1

Mobile Phone/Audio Source Equipment

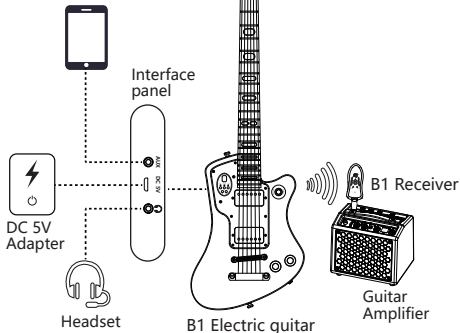


#### Main features

- \* B1 guitar turns on and becomes a wireless multifunctional guitar. Insert B1 receiver into sound system to realize wireless transmission function and support simultaneous use of multiple sets of products;
- \* B1 guitar is built with three commonly used effects: CHS (Chorus), OVDR (Overdrive) and TRE (Tremolo), and the keys switch the effects;
- \* B1 guitar has built-in earphone output, and no other equipment is needed when practicing piano;
- \* B1 guitar supports Aux to input background music, making playing more fun;
- \* B1 Guitar and Receiver Built-in High Capacity Battery, Fully Charged for Continuous Operation for More than 7 Hours. If you don't play for 15 minutes in a row, the guitar will automatically shut down to save energy and protect the environment;
- \* Unique shape design, lighter than ordinary electric guitar 1kg, one third smaller, easy to carry around;
- \* Support the two modes of traditional electric guitar and multifunctional electric guitar, which have both modern and traditional beauty;
- \* B1 applicable occasions: party performance, warm-up exercises before performance, etc. can be played anytime and anywhere. Give you a first-class experience

#### Product Introduction

### B1 Electric guitar

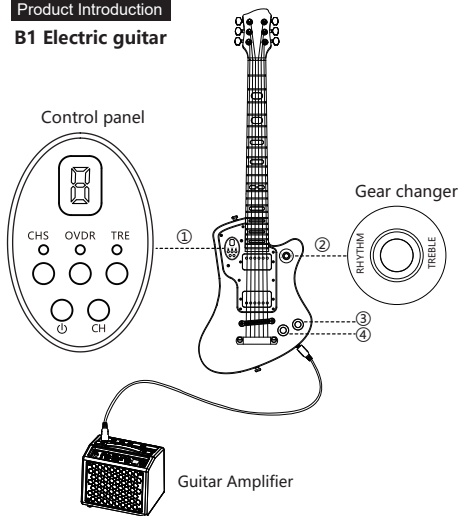


1. Three effect modes : CHS-Chorus mode, OVDR-Overdrive mode, TRE-Tremolo mode. There are corresponding keys under each indicator lamp to switch effects;  
⏻ : Power key, press on or off for a long time;  
CH : Frequency conversion key, short press in startup mode, switch channels between CH0-CH9, short press for ID pairing confirmation when pairing with reception;  
⏻ : Channel display.
2. Dial RHYTHM as the neck mode and TREBLE as the bridge mode. When dial to the middle, the two modes work simultaneously.
3. Guitar volume adjustment knob.
4. Tone adjusting knob.

#### Description of two working modes:

- a. Traditional electric guitar mode: only audio can be connected to output music through audio cable when B1 power is off.
- b. Wireless multi-function mode: only B1 receiver or earphone can output music when B1 power is on.

**Remind : Only one of the above two working modes can be selected.**

### B1 Receiver

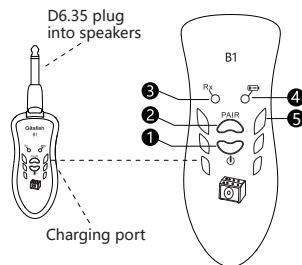

1. "⏻" : Long press it to turn on or off.
2. PAIR : ID Paring button.
3. RX : Receiving LED.
4. ⏻ : The orange light flashes means it is low battery.
5. Charging LED : The red charging LED will light up when it's charging, it will go out after charging finished.

#### Special reminder

if guitar music cannot be transmitted to the receiver, please do the following.

#### Pairing operation

- a. When the B1 guitar is turned off, press the key "⏻" for long until the screen displays "P" and flashes, entering the pairing state.
- b. When the receiver is turned off, press the "PAIR" key first, then press the power key "⏻" to turn on the receiver, and the "RX" light flashes slowly.
- c. Press the "CH" key of the guitar in a short time for confirmation, the guitar display and the "RX" lights on the receiver will be on for a long time, and ID pairing will be completed.

#### The function of pairing

When several sets of products work at the same time, please press the "CH" key on the guitar to stagger the channels to ensure that the sound will not cross talk.

#### Technical Parameters

|                                    |                                 |
|------------------------------------|---------------------------------|
| Work channels : 10                 | Frequency Response : 20HZ-20kHz |
| Power supply : built-in Li battery | Latency : <3ms                  |
| Working Distance : about 50 feet   | Battery life : about 7 hours    |

#### Packaging List

|   |                                 |
|---|---------------------------------|
| B1 Electric guitar-----1                    | 1 out 2 USB charging line-----1 |
| B1 Receiver-----1                           | Audio connector-----1           |
| Guitar backpack-----1                       | User Manual-----1               |
| Guitar adjustment tool (complete set)-----1 |                                 |

A special gift for you.