


## User manual for control board K215-V1.2

### Technical parameter:

Power Supply: DC10--30V

Standby current: 40mA

Fingerprint capacity: 200

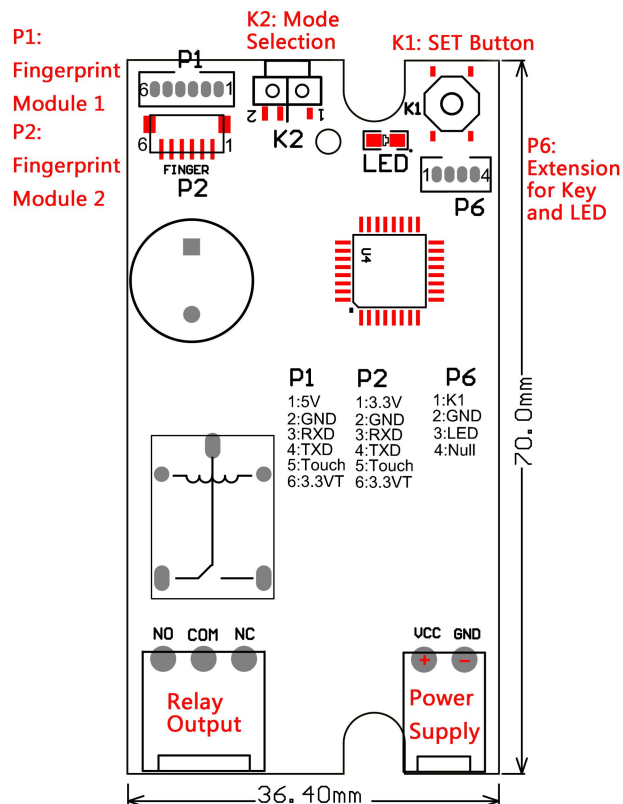

### Instructions for control board:

1. Press SET button shortly, system in register state and blue indicator light flash fast, place your finger in the collection area, fingerprint register successful when hearing music; Fingerprint can be registered continuously when system in register state; if no need adding fingerprint more, waiting 8 seconds.
2. When back to factory default, press SET button until hear "Di" long beep and music, means initialization operation successful.
3. Mode Selection Usage : when chose 2, operating time of the relay is 10s after pass fingerprint. When chose 1, relay operated when fingerprint passed, and then relay released when fingerprint passed again, relay operated and released circularly. Relay released when power off.