

Skywalker X-8 Installation Manual

INSTALLATION DRAWING

Thank you for Purchasing the Skywalker X-8 Plane. The skywalker X-8 is designed for First-Person-Vision(FPV) application specifically. Technical parameters.

PARAMETER

Brand	skywalker rc	Wing area	80dm ²
Model	X8	Flying-weight	5000-6000g
Wingspan	2120mm	C.G. from hand to back	430-440mm
Fuselage length	790mm		

RECOMMENDED CONFIGURATION

Motor	6S 4255	Propeller	14*8F
ESC	80A	Battery	6S 16000mah
Servo	18g	RC	4CH

SKYWALKER RC®



x8配件包展示

SKYWALKER RC®



01



Glue and close the fuselage; Timber boarding everywhere, attention the mounting direction of the board on the winglet.

SKYWALKER RC®



02

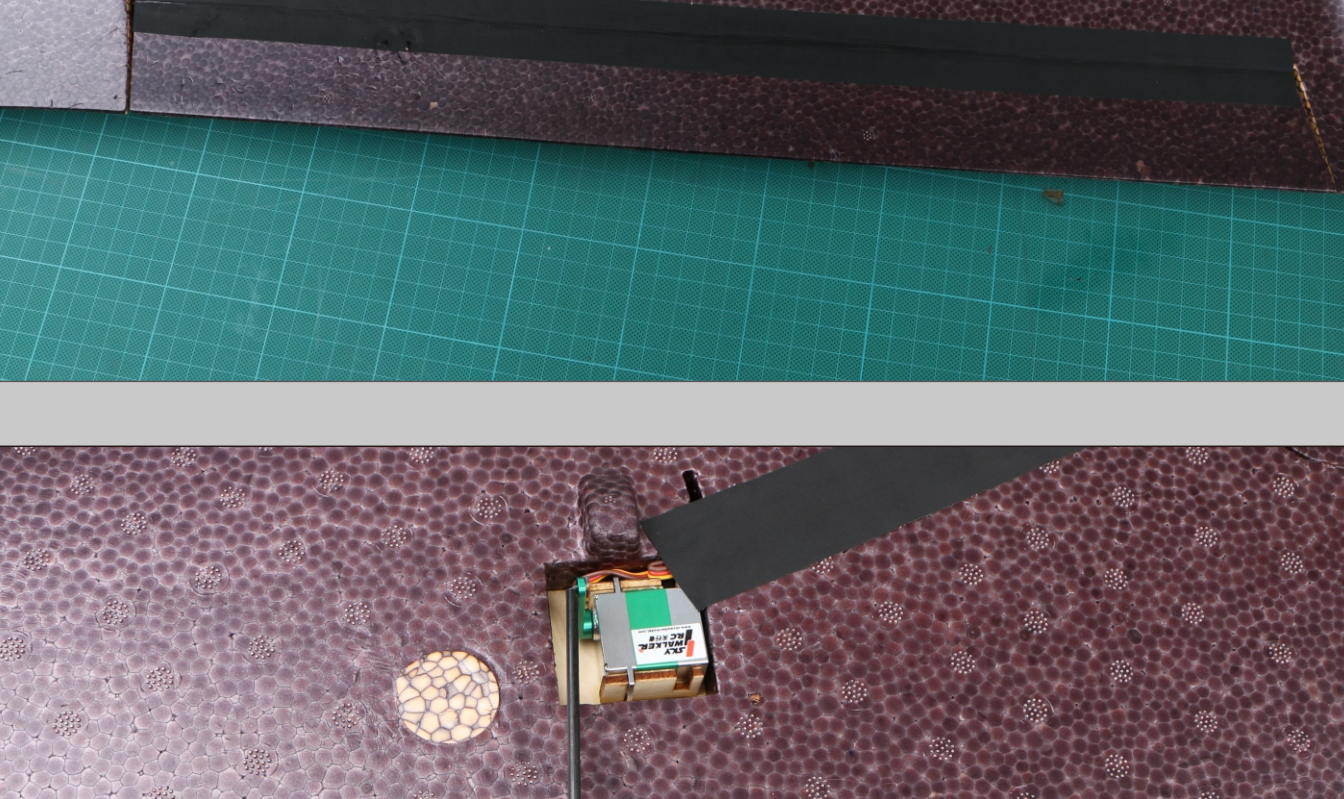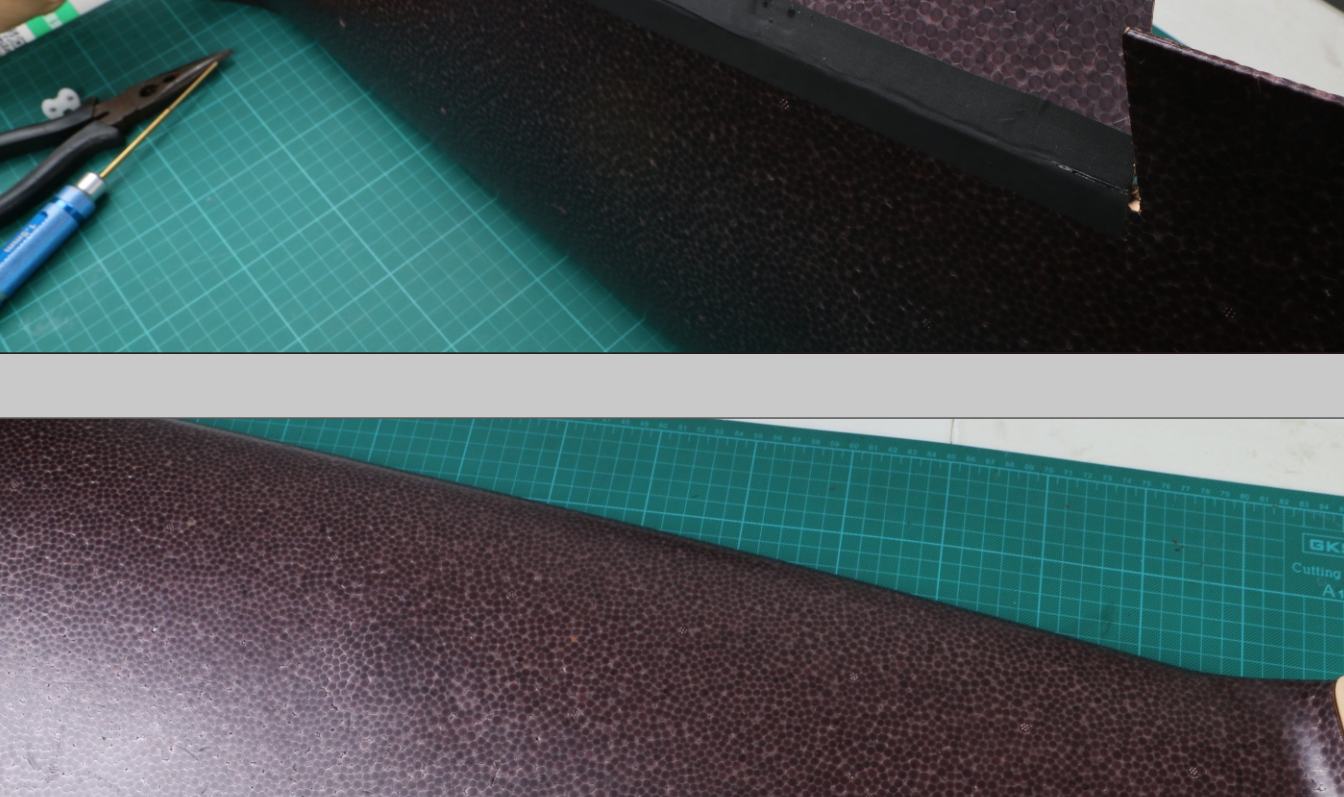

Cut out the pre-reserved slot on the aileron by a new blade. Lay out the wires, Glued foam, bend the ailerons, and put the tape on the ailerons.

SKYWALKER RC®



03

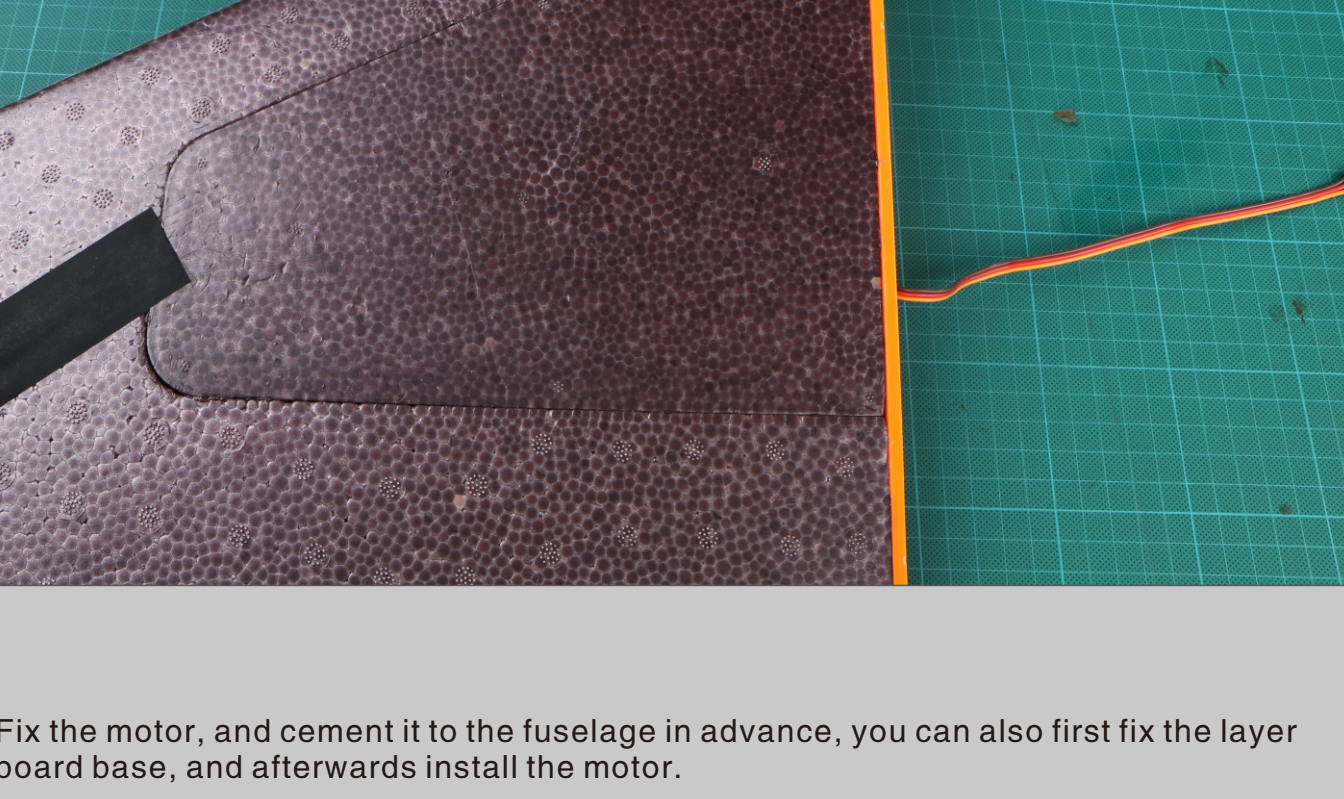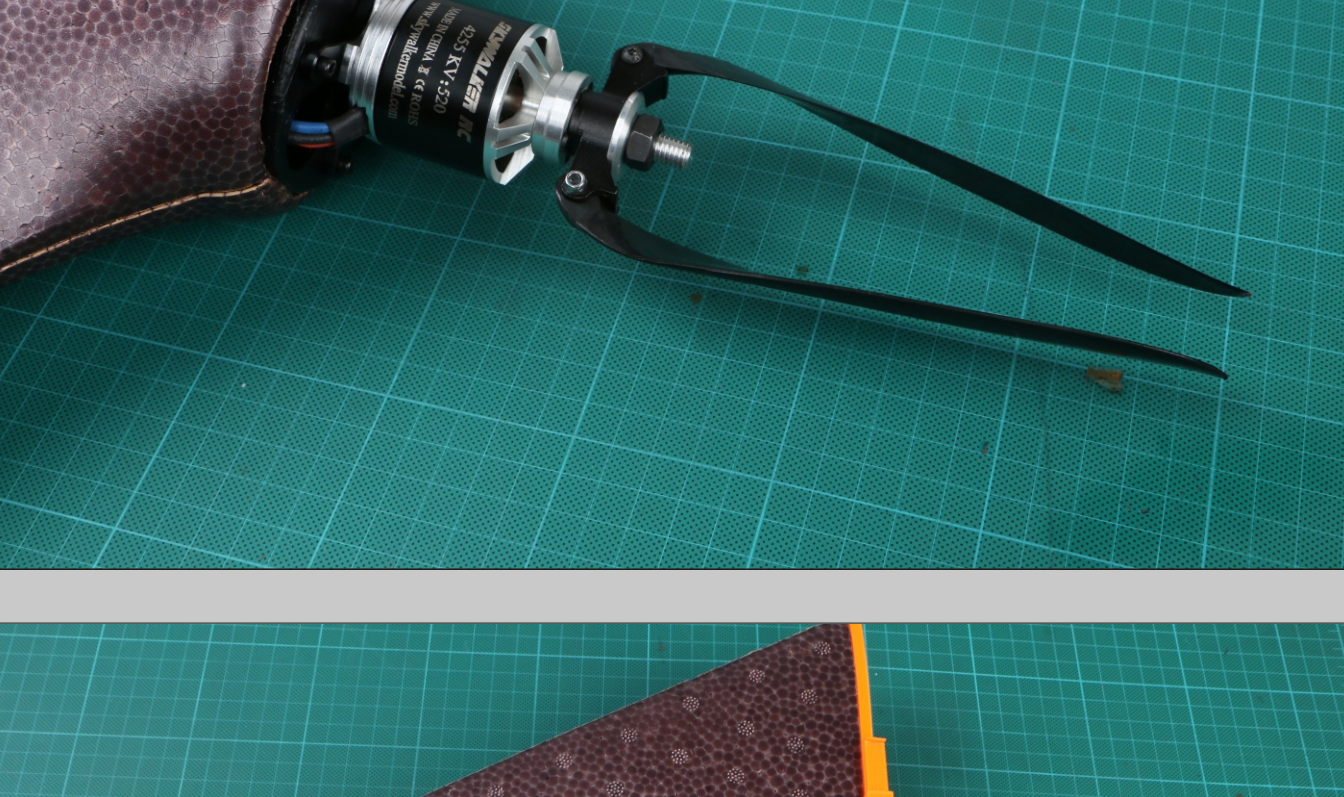

Fix the motor, and cement it to the fuselage in advance, you can also first fix the layer board base, and afterwards install the motor.

SKYWALKER RC®

04

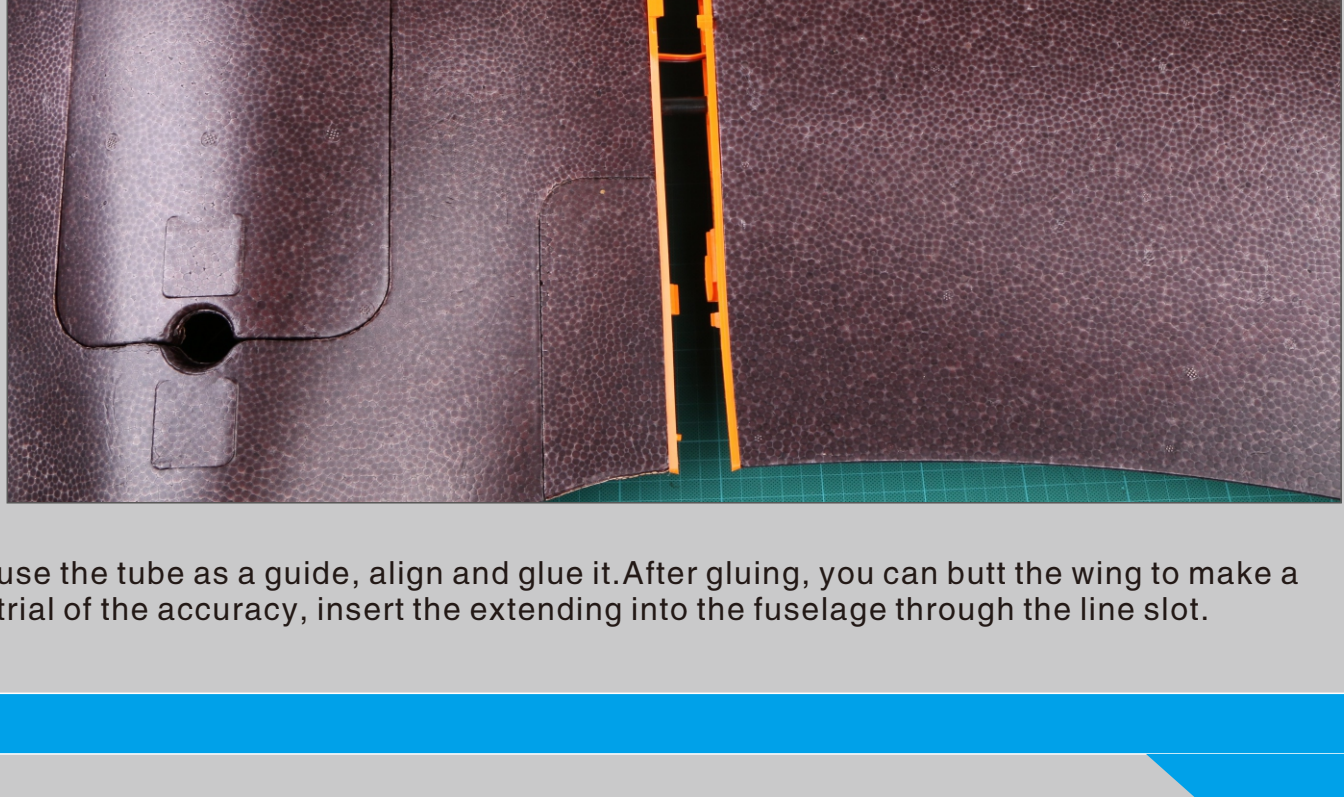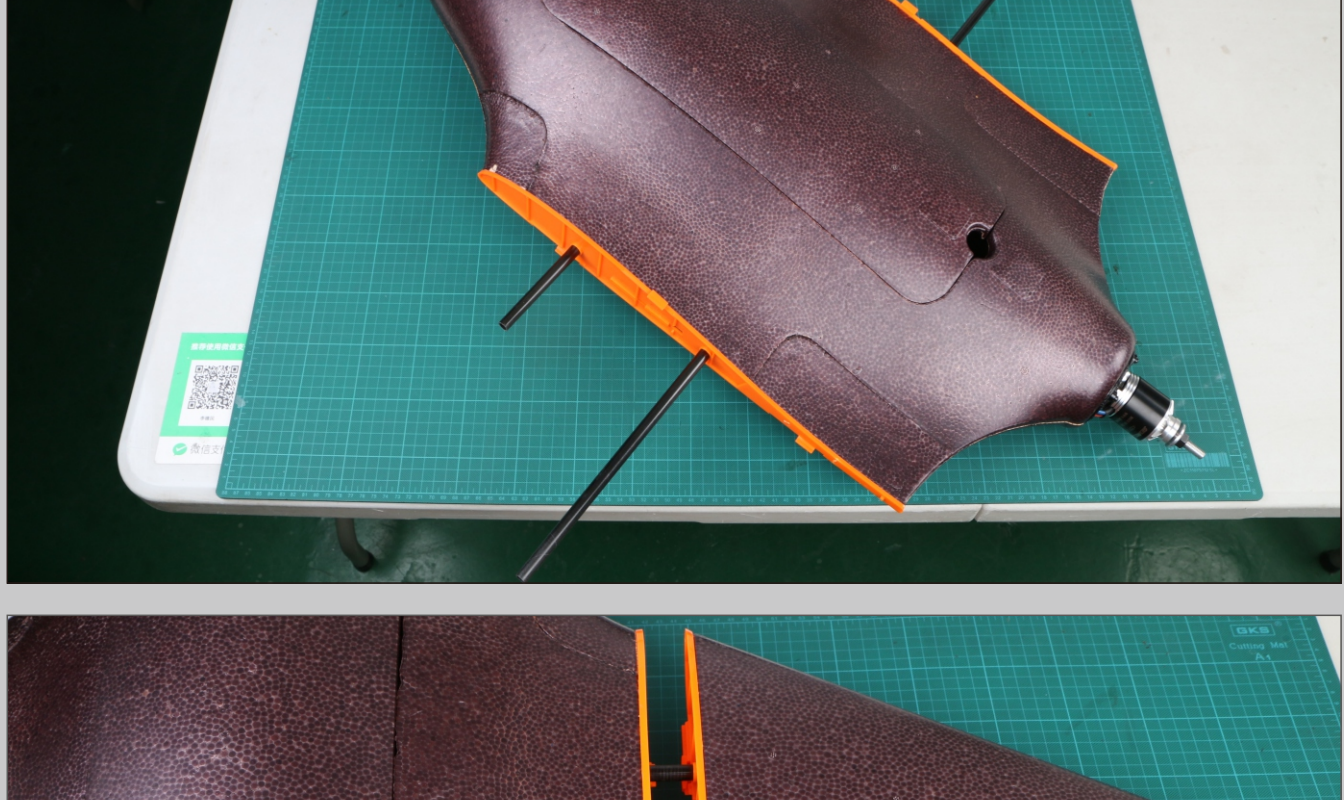

use the tube as a guide, align and glue it. After gluing, you can butt the wing to make a trial of the accuracy, insert the extending into the fuselage through the line slot.

SKYWALKER RC®

05



Put on the Velcro, Finish the installation.

SKYWALKER RC®

06



C.G.: from hand to back 430-440mm