



Controller A

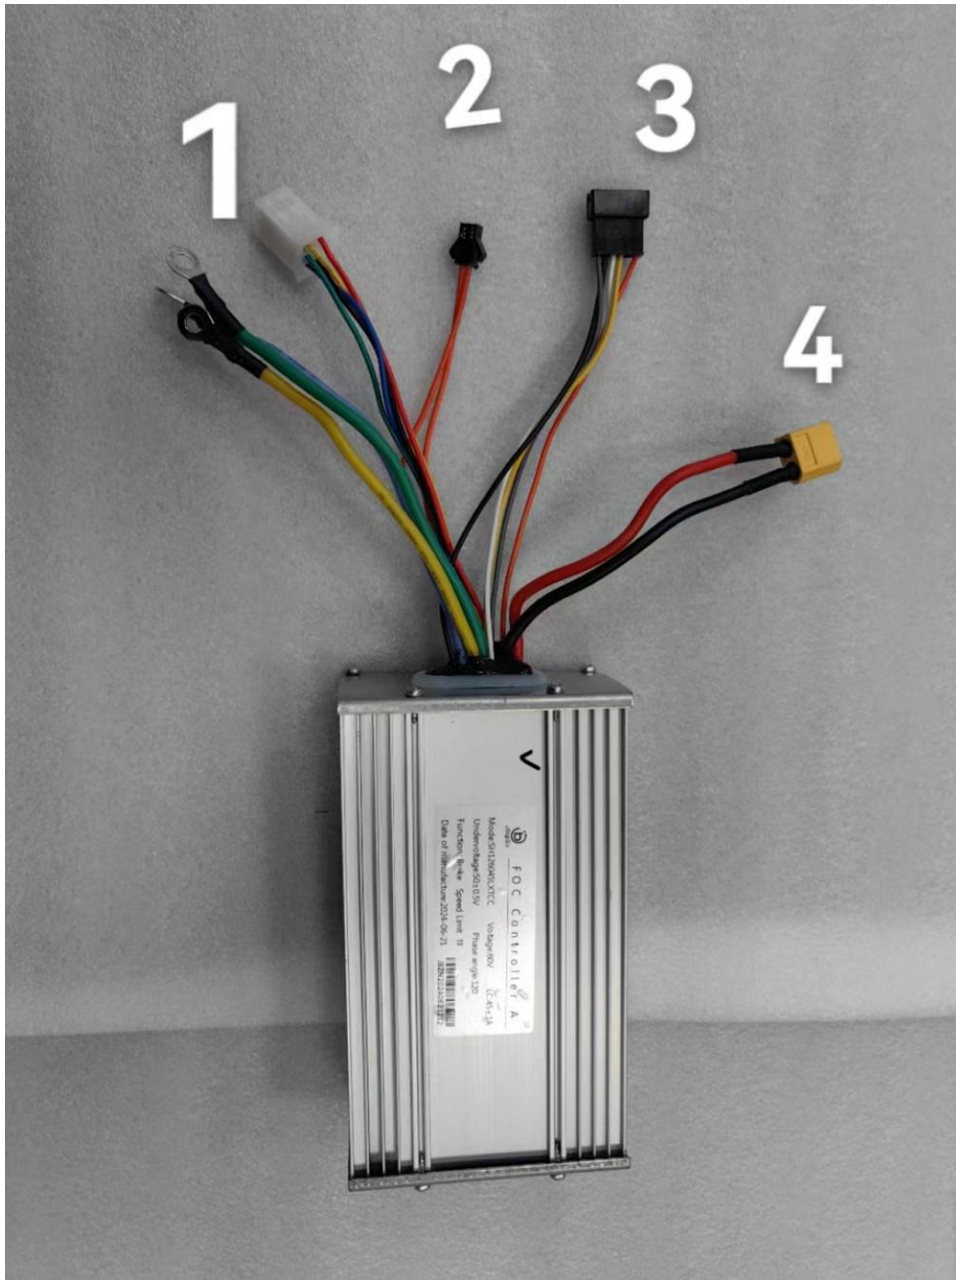


1. Connect the motor
2. Connect the single and double drive switch
3. Connect the controller B
4. Connect the battery

Controller B

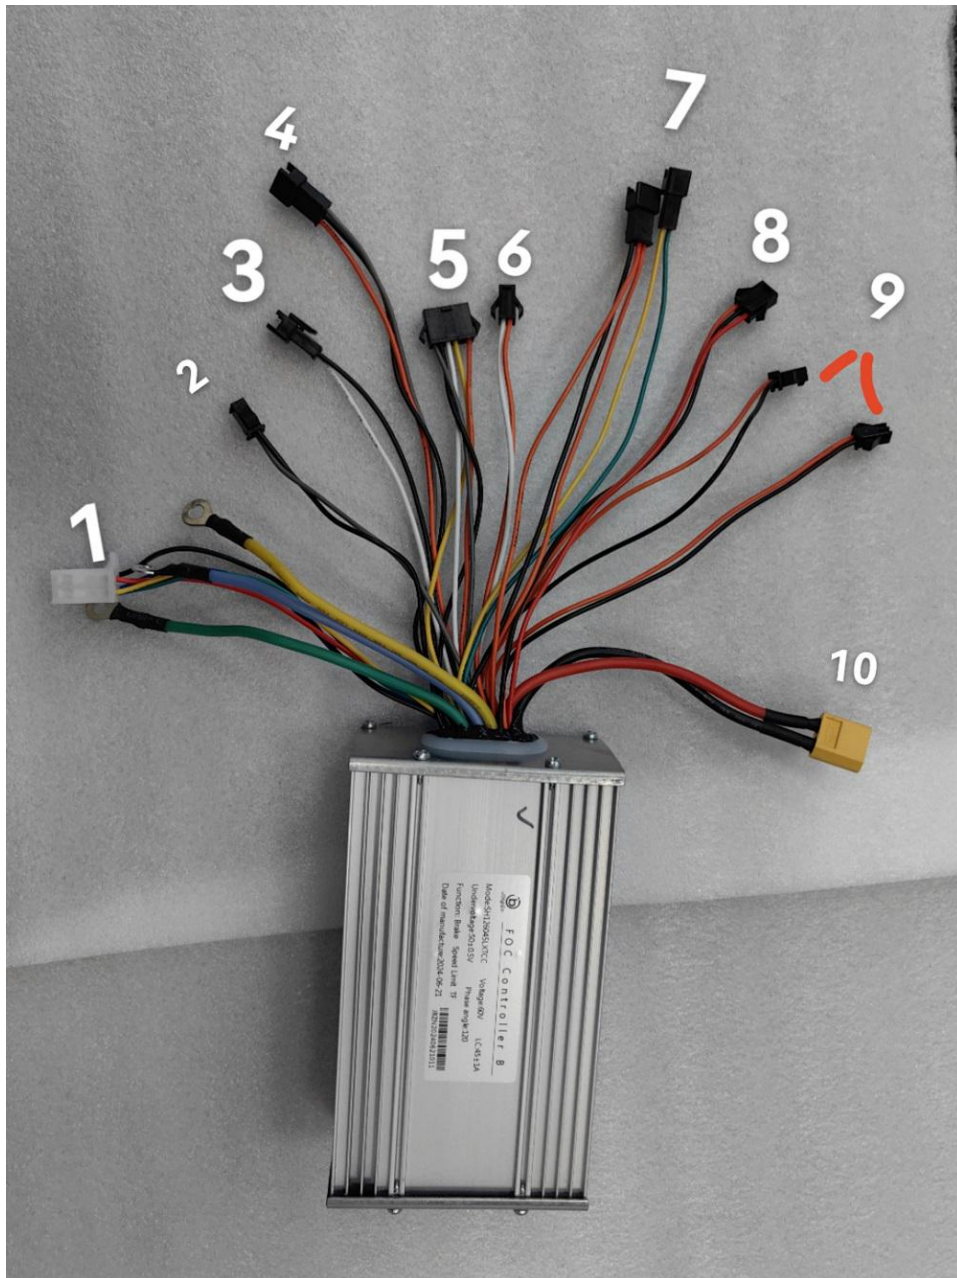


1. Connect the motor
2. Connect the ECO button
3. Connect the brake taillight
4. Connect the center display
5. Connect the controller A
6. Connect the brake taillight
7. Connect the throttle meter
8. Connect the keyhole
9. Power output (connect the steering switch, headlight switch)
10. Connect the battery

Lighting line

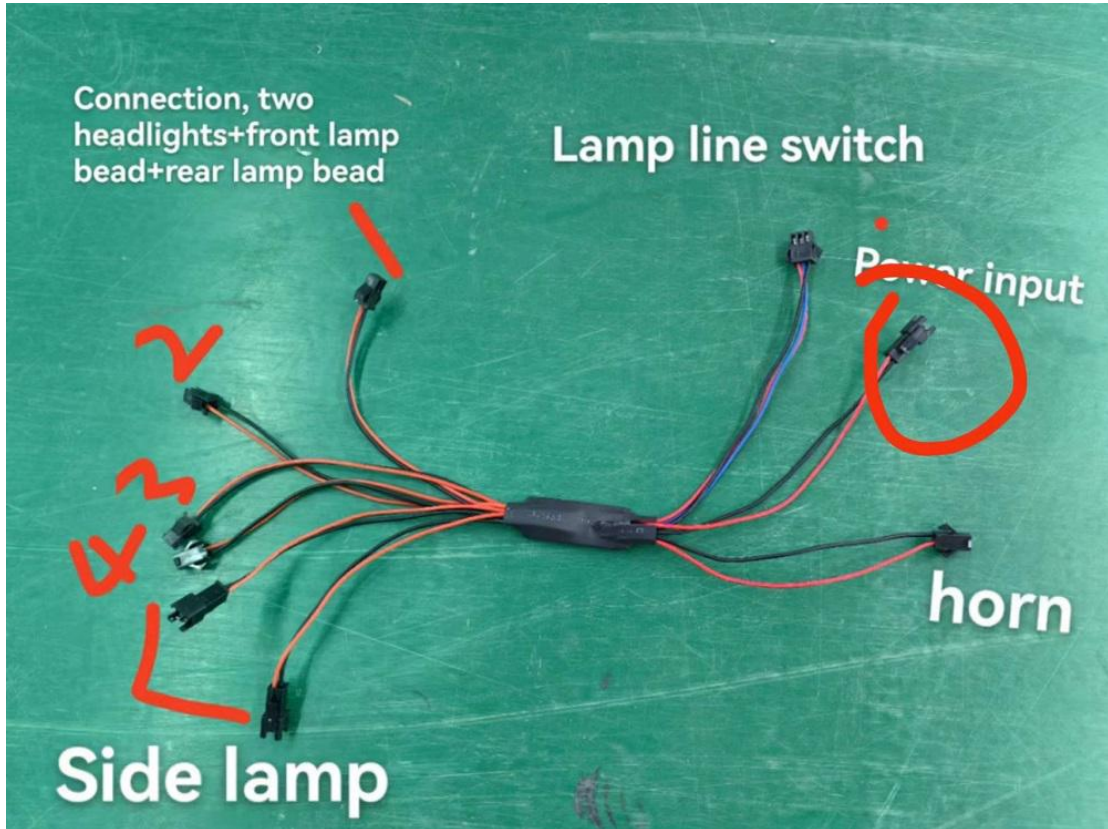


Tips

1. The connection method of LAOTIE Ti30 and LAOTIE ES19 is to connect the motor wire and the Hall wire color to color
2. The motor wire of ANGWATT T1 is to connect the blue and green wires in an alternating manner, and the Hall wires are yellow and blue in an alternating manner (As shown in the figure below)

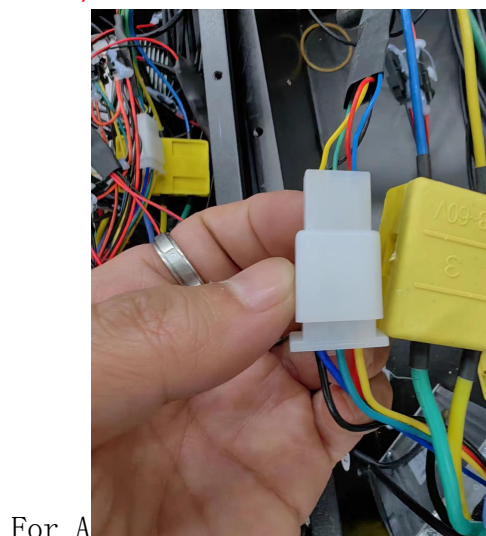

For A

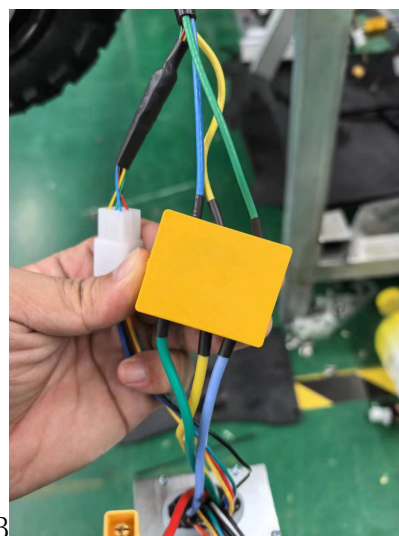

For B