

ME201R Wireless Level Monitor

Manual V1.0

1.Definition



WiFi: Between Gateway and router(max 50m no obstacle)


RF433MHz: Between sensor and Gateway (max 300m no obstacle)

Gateway:

Network Mode: 2.4G WiFi + RF433 MHz

Gateway Power Input: DC 5V @ 1A

Power Interface: Type-C (0.8m Cable)

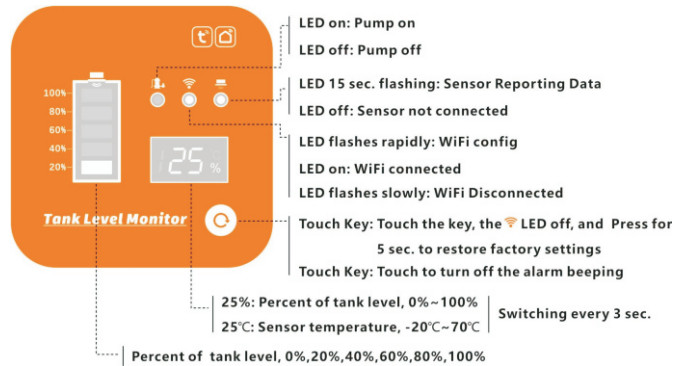

Sensor:

Adaptor: AC 110V~240V

Sensor Power Input: ≤100mA @ 5V DC

Network Mode: RF433MHz

Level Range: 0.1m~4m

Accuracy: ±0.02m

Operation Temperature: -20°C ~ 70°C


Protection: IP65

Touch Key (☺): Invalid key


LED light: RF status

Led 15 sec. flashing: Sensor Reporting Data

Led off: Sensor Not Reporting




2.Display Instructions

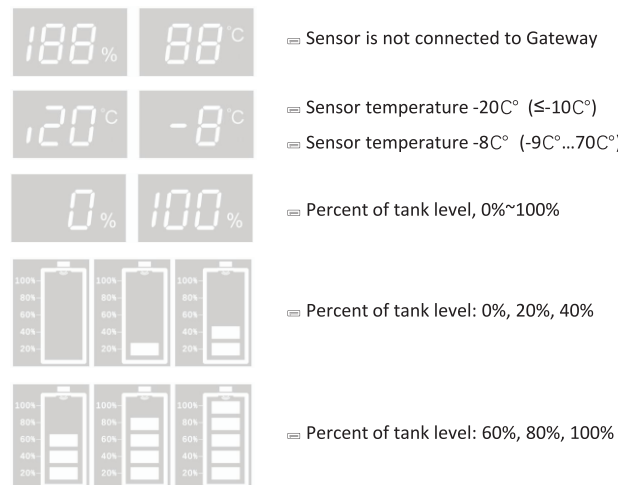

3.Connection

1. Power on the AC/DC ADAPTOR first, and then power on the sensor.
2. Power on the gateway with a 5V/1A adapter.
3. Scan code to download “TUYA Smart APP” or “Smart Life APP” on mobile device.



4.Network Reset


Press and hold the gateway touch key (☺) for 5s, the led light (☺) flashes rapidly, then release the button, the network reset, the device connect to the network automatically.

5.Connecting gateway to APP

Turn on the WiFi and Bluetooth of your phone, enter the app and add device.

*Note:


1. WiFi frequency can only be 2.4GHz, not 5GHz;
2. When adding a device, make sure that the gateway and the phone are connected to the same WiFi. After the setting is complete, the indicator must work under steady light. If the phone cannot find the device or fails to connect to the device, hold down the button for 5s until the indicator flashes to add the device again.

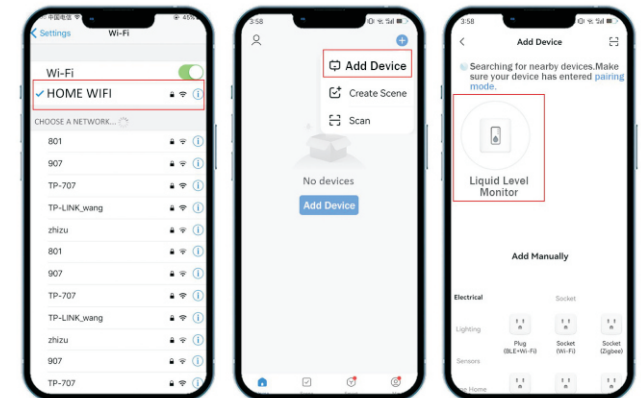

01-Turn on mobile
WiFi & Bluetooth


02-Add device

03-Connect Level
Monitor

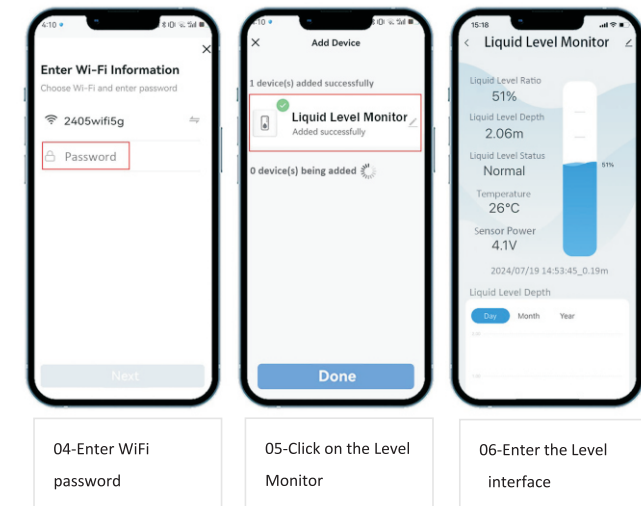

4.Setting

1. **Installation height:** Set the distance from sensor to tank bottom (**A**);
2. **Liquid maximum depth:** Maximum height of liquid in tank (**B**);
3. **Set Max:** Set Max for high level alarm (**Actual liquid level value C**);
4. **Set Min:** Set Min for low level alarm;
5. **Sensor ID:** Gateway link sensor's ID, default is linked;
To re-link another sensor, write the ID of the new sensor;
6. **Beep Alarm:** Turn on/off the device alarm sound.

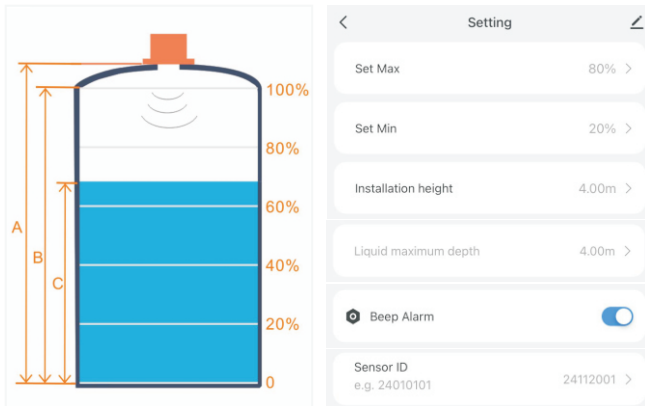



e.g.

Installation height, A=4m; Liquid maximum depth, B=3m;
 Actual liquid level value, C=2m; Set Max=60%, Set Min=20%,
 Level Status: **Full alarm** ($C/B \times 100\% = 2/3 \times 100\% = 67\%$)

5.Installation

1. Remove the release paper from the gasket, and attach the gasket to the center of the tank where the hole will be drilled.
2. Drill a hole right in the middle of the tank with a diameter of >55mm;
3. Place the sensor over the gasket, Keeping it aligned with the screw holes. unobstructed;
4. Fasten the sensor with a self-tapping screw.

***Note:** If the mounting surface is curved, it is sufficient to fix the sensor with screws just, prevent the sensor from being stressed; when the data is abnormal, the screws must be loosened.

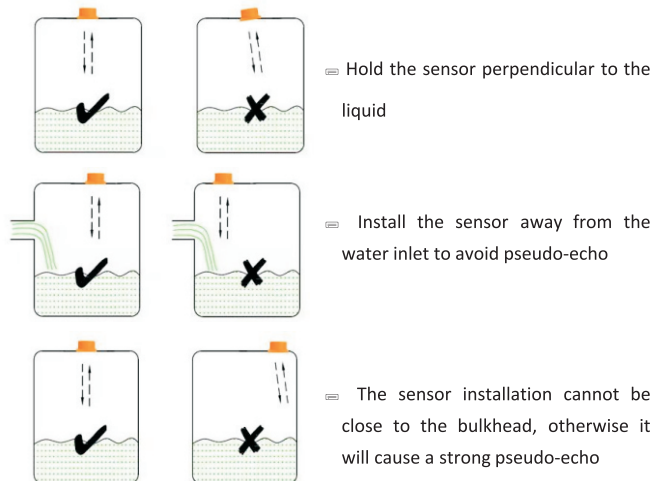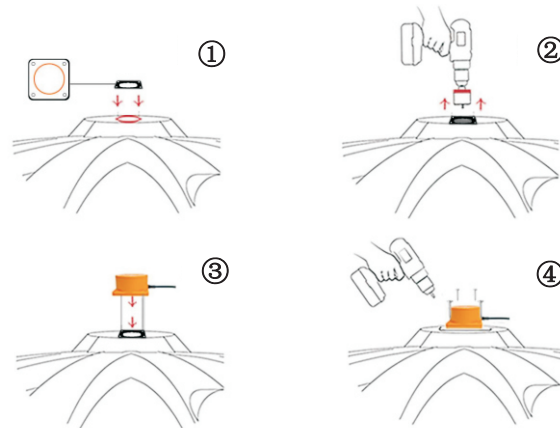


6.APP Interface



Normal

No Sensor

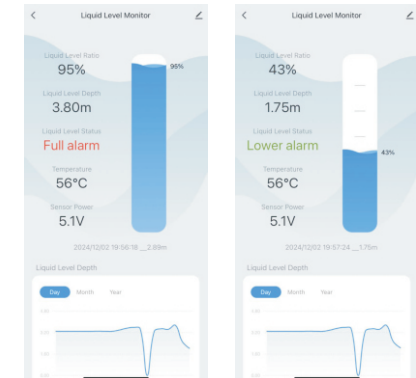

Full Alarm

Low Alarm