


## JM\_AMG8833\_CP IR Camera

### One. Summary


1. Module:JM\_AMG8833\_CP
2. Use AMG8833 IR Sensor
3. Resolution : 8x8
4. Temperature measurement range : 0°C~80°C
5. Measurement accuracy : +/-3.5°C(Central point,20~50°C)
6. Operate temperature : 10°C~50°C
7. Operate humidity: <=70%
8. Refresh rate : 10HZ
9. No need to calibrate
10. FOV : 60° x60°
11. Display center point temperature
12. Rechargeable Battery
13. TFT size : 1.8inch(display resolution: 160x120)
14. Product size : 61x46x18.6mm
15. Power port : Micro USB 5V/1A

### Two. Interface description

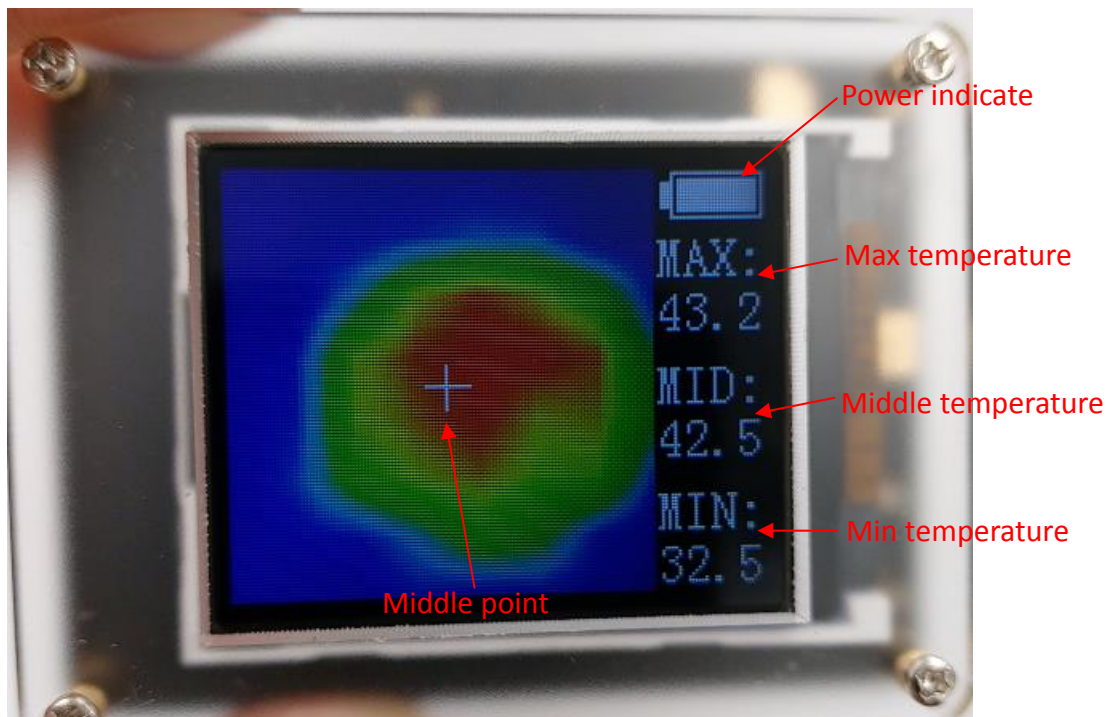

### Three. Operate description

1. Press long Power key, the product will open and it can work.
2. Press long Power key to shut down

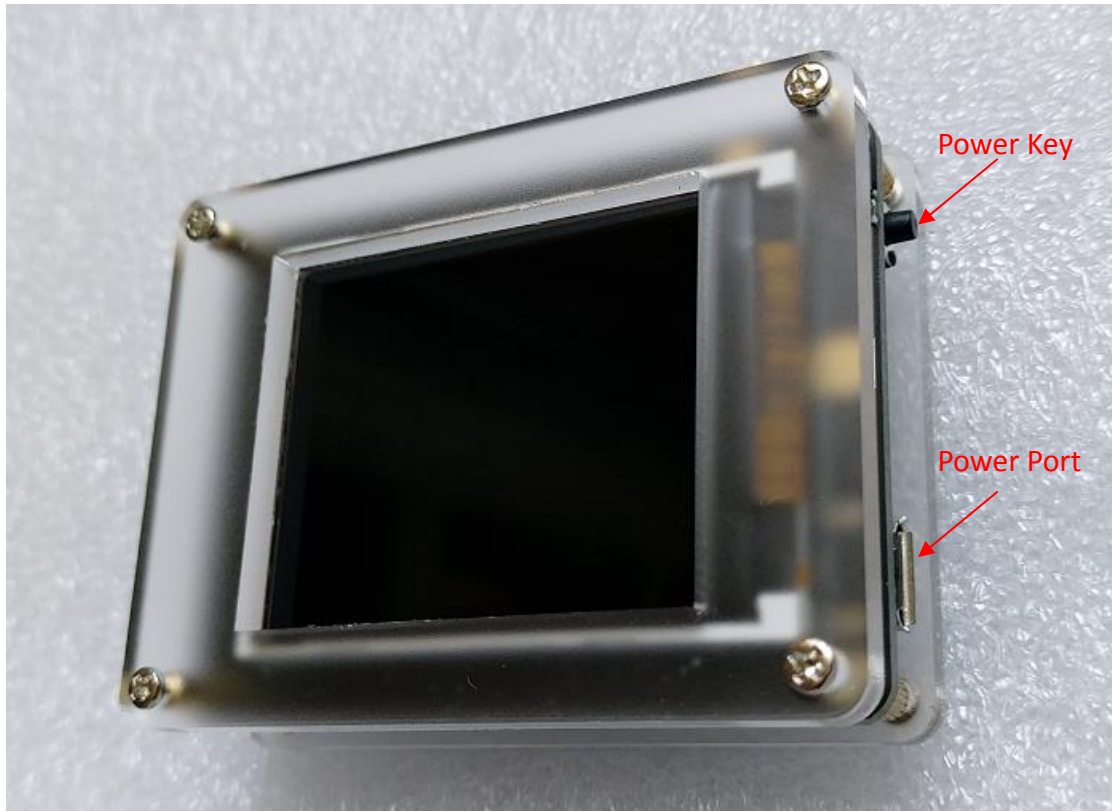

R0.0